



 **elica**
D R Cooker Hoods

Innovative Design, Efficient
Performance and Quality Build.

All over the world the name Elica
is synonymous with efficiency,
innovation and design in the
production of cooker hoods.

Beautiful, distinctive and stylish
design is the unifying element and
core philosophy for our entire range
of cooker hoods. Universally
acclaimed for their radically innovative
appearance, our products are far
more than simple hoods for domestic
kitchens: they are key personalities
that define the room in which they
are installed.

Elica no longer design hoods:
we design the air itself.

Elica Collection

Elica collection represents the pinnacle
of our entire range. We leave no stone
unturned in pushing the boundaries of
design or revolutionising the concept of
what a cooker hood should be. In terms of
both aesthetics and quiet performance our
finest models create a stunning focal point
for modern kitchen design; truly a breath
of fresh air in form and function.

Elica Concept

Our Elica Concept range defines itself
with models of extraordinary elegance
and effortless efficiency. No other
manufacturer combines such an inspired
choice of materials with our unparalleled
dedication to design and quality. To allow
your imagination free reign, our Elica
Concept range has been carefully
assembled with the broadest choice of
possibilities, for today's kitchens.

Traditional Models

Though fashions may change, some models
remain timeless. At Elica we have over
30 years experience in producing efficient
and well made cooker hoods that have
stood the test of time. We offer hoods that
combine beautifully with your chosen
kitchen units; models that shelter behind
or under your fascia allowing you efficient
extraction with continuity of style. Added to
this are individual hoods, specifically
designed for use with the ever popular
range cooker, models which can be
matched for colour as well as style.

Index	1	Spot	44
Technology AST, Meteo, Magic Wand	2	Stenar	45
		Stone	46
Elica Collection		Tamaya	47
Antartica	5	Tonda	48
Artica	6	Tuscan	49
Atlantica	7	Typhoon	50
Atlantis	8		
Bogart	9	Elica Concept Island, Ceiling Mounted and Corner Hoods	
Capta	10	Aluminose Island	51
Concave	11	Cubica Island	52
Cube Light	12	Freespot Island	53
Edge	13	Glacier Island	54
Futura	14	Iceberg Island	55
Grace	15	Nadir	56
Isolabella	16	Naked	57
Menhir	17	Salt Lake Island	58
Mini Om	18	Tuscan Island	59
Om	19	Hydra Corner	60
Optica	20	Synthesis Corner	61
Platinum	21		
Solaris	22	Elica Concept Range Hoods	
Star	23	Cove	
Twin	24	Feeling	62
Wave	25	Pro Anglo	
		Pro Europa	63
Elica Concept		Glide	64
Ala	27	Slide Away 60 & 90 Twin	
Aluminium	28	Built in 52	65
Aqua	29	Built in 60, 60T & 80T	
Aurora	30	Built in 60 & 80 Remote	66
Bridge	31	Built in 60 Deluxe	
Cresta	32	Built in 80 UHS	67
Cube	33	Integrated NG	
Flag	34	Integrated NG SP & SPT	68
Focus	35	Chic	
Glacier	36	Concorde & Concorde Twin	69
Igloo	37		
Jem	38	Accessories	70
Key	39	Dimensional Drawings & Technical Specifications	71
Plaza	40		
Polar	41	Choosing your Elica Cooker Hood	84
Samurai	42		
Slope	43	Key to symbols	85





Automatic Sensor Technology (AST)

Imagine a cooker hood that can react automatically without you touching a switch. Developed and patented by Elica, AST makes use of three individual sensors which measure heat, ambient temperature and humidity. These control the hood by precisely assessing the cooking conditions and adjusting the extraction power to suit. This allows the hood to improve air quality as well as minimising noise levels and energy consumption.

Meteo

Meteo is our advanced electronic control system available as an option on selected Elica hoods. The display constantly updates you with useful information such as a handy digital clock and an indispensable timer with alarm. It also shows information about the hood such as extraction speed and condition of filters. But it does not end there; an external sensor supplies extra information to give you external temperature, pressure and a useful weather forecast.

Perimeter Aspiration

Elica now designs the air itself. Precision engineering directs the airflow across the entire surface of the hood, thus increasing the effective extraction area. This Elica developed system reduces energy consumption and noise and has led to the development of some of our most striking hood designs.

Optimised Aspiration System

Elica hoods treat fumes, odours and vapour - and they do it with very little noise. Our Optimised Aspiration System has reduced noise by 30%, reaching the ideal synthesis between aspiration, efficiency and silence.

Smart Installation System

Smart Installation System utilises the same simple yet strong fixings used to attach kitchen cabinets to walls. Once the hood is installed, Elica's Smart Installation System offers 3 dimensional adjustments to perfectly align the hood to the rest of the kitchen.

Magic Wand Control

Our latest cutting edge technology “magically” enclosed in a slender steel stem. The gentlest of touches to the upper section controls the extraction speed, another to the lower and the lighting dims or rises to your command. An illuminated ring on the stem, changes colour with each touch to keep you informed of the current extraction speed.

Remote Control

For even greater convenience, selected models offer the ease of a remote control for both light and extraction control. Innovative design once again gives the remote control units that special “Elica” look.


External Motors

Many Elica models offer an external motor version. Here the motor and fan are either located in a loft space or on an outside wall. The result, superior performance with reduced extractor sound. We recommend the use of rigid or aluminium flexible ducting when installing external motors.

Testing to the Most Vigorous Standards

The stated performance levels are measured according to the strictest and most up-to-date technical standards (Airflow/Pressure Standard IEC61591). The values (expressed in m³/h) are reported in the technical specification of each product and are designated as follows:

- IEC Airflow: test carried out with a standard 2.5m duct applied to the product.
- Maximum Airflow (Free Outlet): test carried out directly at the outlet point of the hood.
- Noise level: standards IEC60704-1; IEC60704-2-13.
- Power consumption: power of motor and lighting

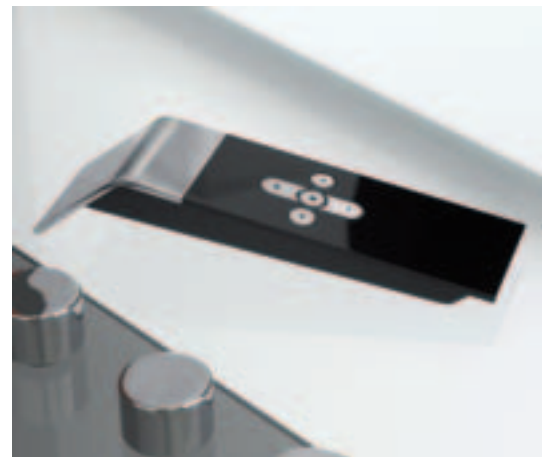

Elica Collection






Antartica



Artica





Atlantica



Atlantis





Bogart



Capta





Concave



Cube Light





Edge



Futura





Grace



Isolabella





Menhir



Mini 0m





0m



Optica





Platinum



Solaris





Star



Twin





Wave

Elica Concept





Ala



Aluminium





Aqua



Aurora







Bridge




Cresta





Cube



Flag





Focus



Glacier





Igloo





Jem




 600 or 900 mm





Key



Plaza






Polar



Samurai





Slope




Spot





Stenar

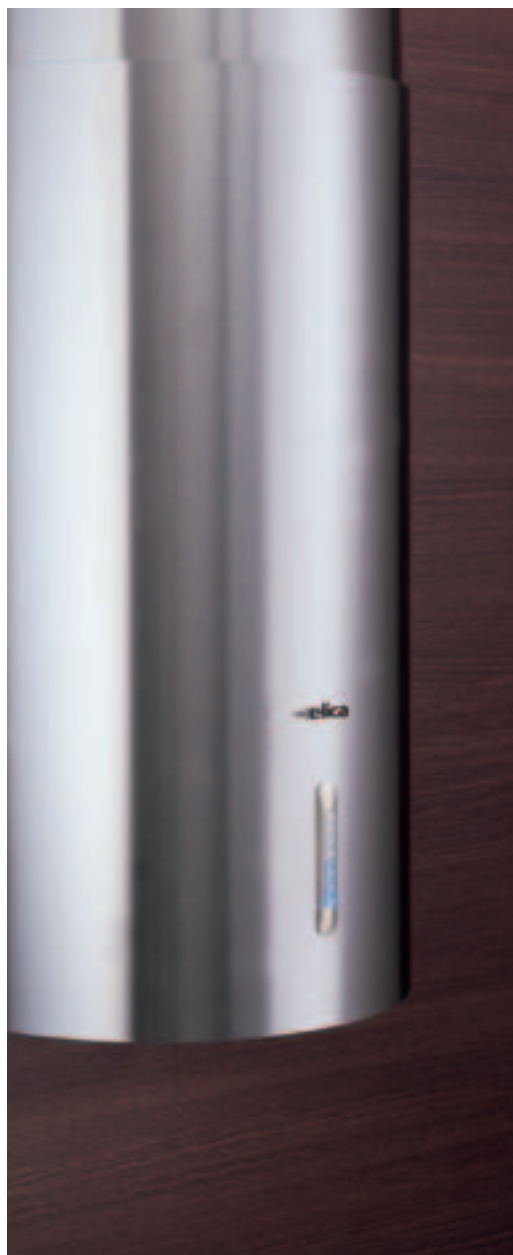

Stone






600, 700, 900 or 1000 mm



Tamaya



Tonda





600 or 900 mm



Tuscan



Typhoon





Aluminose Island



Cubica Island





|  |
| 1000 or 1200 mm |



Free Spot Island



Glacier Island





Iceberg Island



Nadir






Naked




Salt Lake Island





Tuscan Island



Hydra Corner











1000 x 1000 mm



Synthesis Corner



Cove


 600, 900, 1000, 1100 or 1200mm			
			



Feeling

 900 mm			
---	---	---	--

Pro Anglo



Pro Europa





Glide



Slide Away 60 & 90 Twin



Built in 52



Built in 60 Super Twin & 80 Super Twin



Built in 60 Remote & 80 Remote



Built in 60 Deluxe



Built in 80 UHS



Integrated NG



Integrated NG SP & SPT



Chic



Concorde & Concorde Twin

Concorde



Concorde Twin






Chimney Kits

To accommodate different ceiling heights in different kitchen installations we offer stainless steel chimney extension kits for Aqua, Igloo, Key and Tamaya. Special short chimney kits for the Aqua, Key and Tamaya are also available.


Back Plates

For that professional finishing touch use our stainless steel back plates. Our back plates are stiffened with MDF and are available in 600, 700, 800, 900, 1000, 1100 or 1200 mm widths and 650 or 750 mm heights. The fitting flanges with depths of 20mm or 36mm make them suitable for almost all cooker hoods including our Glacier models.

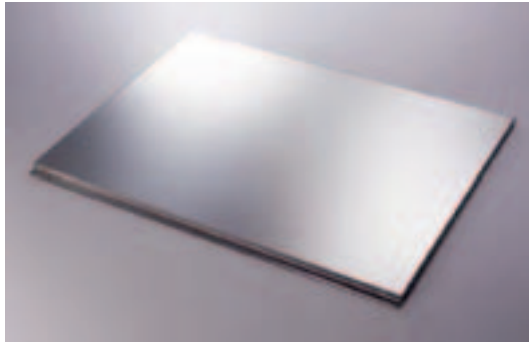


Charcoal Filters

The Charcoal filter is the essential component for using your Elica hood in recycling mode. Each hood requires a specific charcoal filter but selected hoods offer the choice of a standard filter, which offers air cleaning and odour removal for up to 12 months, or a long life filter which can last over 3 years. Long life filters are available for selected Elica Collection and Concept range hoods and are made of technologically advanced activated charcoal. These waste saving filters can be taken out of the hood, washed in a dish washer, dried in a low oven and then placed back in the hood.

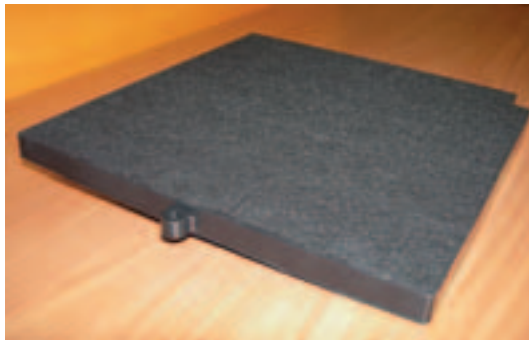

Plinth Heaters

Add that extra bit of warmth to your kitchen with our 2 kW built-in electric plinth heater. This compact fan heater is designed for installation in standard kitchen furniture plinths with 1 kW and 2 kW heat settings and neon indicator.

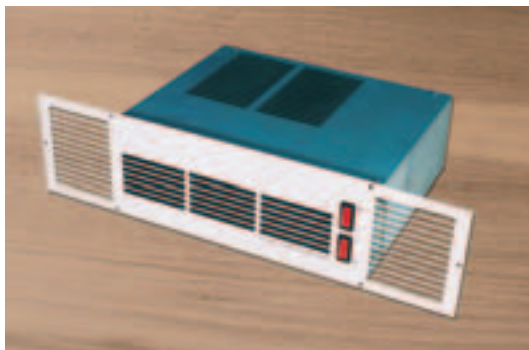


Ducting

Fitting the correct size ducting is of vital importance to the performance of a cooker hood and the ducting chosen must be at least the same size as the connector on the hood. The majority of Elica cooker hoods require 6" (150mm) ducting as they are high performance models, however the correct ducting size is specified in the


technical specifications (Pages 72 to 83) or in the installation instructions that come with the hood. The use of smaller than recommended ducting will adversely affect the designed performance as regards airflow and noise levels. We recommend the use of rigid or aluminium flexible ducting when installing external motors.

100mm (4") nominal

DK 4/9 3M long



DK 4/3 1M long
DK 4/4 2M long
DK 4/5 3M long



UB41 Universal roof vent




6D2RSS Stainless steel
cowled wall outlet




125mm (5") nominal

DK 5/8 3M long



DK 5/2 1M long
DK 5/3 2M long
DK 5/4 3M long



DK 5/11 Return air box




6B150A/6300A Aluminium flexible ducting




150mm (6") nominal

DK 6/7 3M long



DK 6/1 1M long
DK 6/2 2M long
DK 6/3 3M long




DK 6/100 1M long Recycling kit




We can supply a full range of ducting kits and components for your Elica cooker hood. Please ask to see separate Freeflow Ducting leaflet for the complete range or visit www.elica.co.uk

Antartica Island




Finish Stainless steel with curved glass
Controls 3 speed illuminated soft push buttons. 3 speed electronic rotary controls + boost with filter saturation indicators (AST models only). Available with 'Meteo' touch control or with 'AST'
Lights 4 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available size 1000mm x 700mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-61 dB(A)
Power consumption 260w.
 Includes sound absorbing kit. Optimised aspiration system. Available with 1200 m³/h external motor with 3 speed touch controls + boost (Not AST or Meteo)
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Atlantis

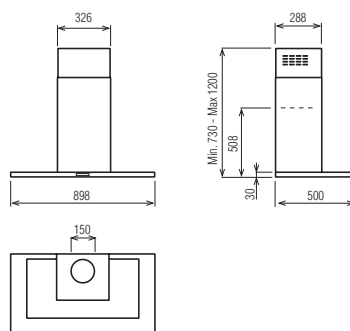


Finish Stainless steel with glass
Controls 3 speed illuminated soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-61 dB(A)
Power consumption 220w.
 Includes sound absorbing kit. Smart installation system. Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Artica

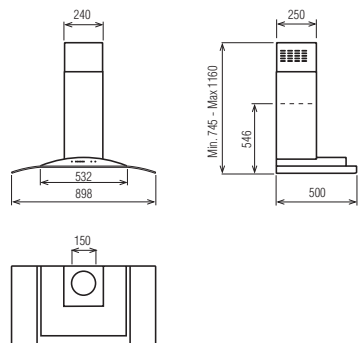


Finish Stainless steel with curved glass
Controls 3 speed illuminated soft push buttons. 3 speed electronic rotary controls + boost with filter saturation indicators (AST Models only). Available with 'Meteo' touch control or with 'AST'
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-61 dB(A)
Power consumption 220w.
 Includes sound absorbing kit. Smart installation system. Optimised aspiration system. Available with 1200 m³/h external motor with 3 speed touch controls + boost (Not AST or Meteo)
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Bogart

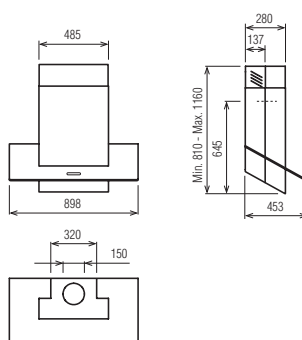


Finish Stainless steel with glass
Controls 3 speed illuminated soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-61 dB(A)
Power consumption 220w.
 Includes sound absorbing kit. Smart installation system. Optimised aspiration system.
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Atlantica Island

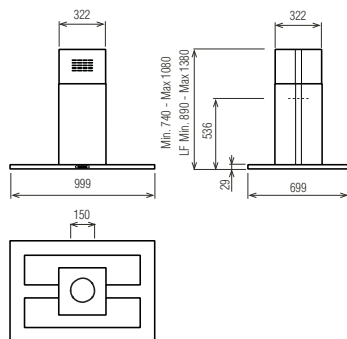

Finish Stainless steel with glass
Controls 3 speed illuminated soft push buttons
Lights 4 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available size 1000mm x 700mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-61 dB(A)
Power consumption 260w.
 Includes sound absorbing kit. Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit


Capta

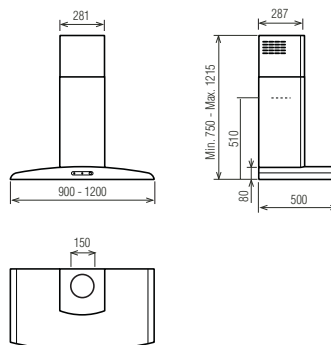

Finish Stainless steel
Controls 3 speed electronic rotary controls + boost with filter saturation indicators and 'Automatic Sensor Technology'. Also available with 'Meteo' touch control or 'Meteo +AST' touch control
Lights 2 x 11w fluorescent lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm or 1200mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-61 dB(A)
Power consumption 200w.
 Includes sound absorbing kit. Smart installation system. Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit


* Charcoal filters are required if hood is to be used in recirculating mode

Concave

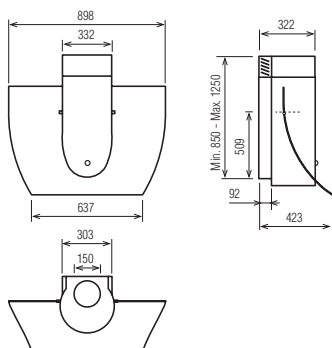


Finish Stainless steel with blue aluminium
Controls 3 speed control-ball + boost with filter saturation indicators and remote control unit
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-59 dB(A)
Power consumption 220w
 Includes sound absorbing kit
 Smart installation system
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Futura

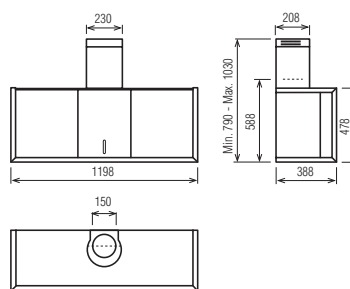


Finish Stainless steel and glass
Controls 3 speed illuminated soft push buttons
Lights 4 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 1200mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-61 dB(A)
Power consumption 260w
 Includes sound absorbing kit
 Smart installation system
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Cube Light

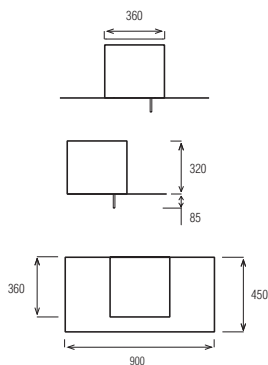


Finish Stainless steel with illuminated glass
Controls 3 speed illuminated 'Magic Wand' touch sensor + boost with remote control unit
Lights 1 x 40w halogen lamp + 40w neon lamp
Grease filter Metal washable grease filters & long-life odour filters included
Available widths 900mm
Maximum airflow 500 m³/h
Maximum airflow (recycling) 280 m³/h
IEC airflow 400 m³/h
Noise level 43-62 dB(A)
Power consumption 180w
 Wall mounted 'Evolution' system
Charcoal filter* CF/433 (included)

Grace




Finish Stainless steel with illuminated glass
Controls 3 speed illuminated 'Magic Wand' touch sensor + boost with remote control unit
Lights 1 x 40w halogen lamp + 3 x 40w lamps
Grease filter Metal washable grease filters & long-life odour filters included
Available widths 510mm
Maximum airflow 500 m³/h
Maximum airflow (recycling) 280 m³/h
IEC airflow 400 m³/h
Noise level 43-62 dB(A)
Power consumption 260w
 Ceiling or wall mounted 'Evolution' system
Charcoal filter* CF/433 (included)

Edge

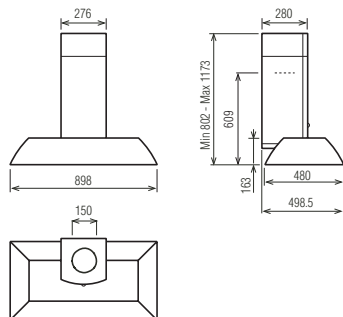


Finish Stainless steel with dual direction illuminated glass
Controls 3 speed control-ball + boost with filter saturation indicators and remote control unit
Lights 3 x 13w fluorescent lamps
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-59 dB(A)
Power consumption 220w
 Includes sound absorbing kit
 Smart installation system
 Perimeter aspiration
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Isolabella

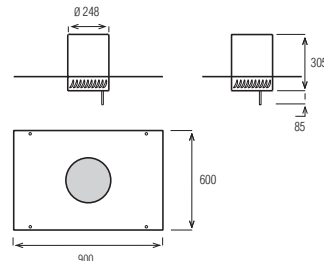


Finish Stainless steel and glass
Controls 3 speed illuminated 'Magic Wand' touch sensor + boost with remote control unit
Lights 1 x 40w halogen lamp
Grease filter Metal washable grease filters & long-life odour filters included
Available widths 900mm
Maximum airflow 500 m³/h
Maximum airflow (recycling) 280 m³/h
IEC airflow 400 m³/h
Noise level 43-62 dB(A)
Power consumption 140w
 Ceiling mounted 'Evolution' system
Charcoal filter* CF/433 (included)

Menhir

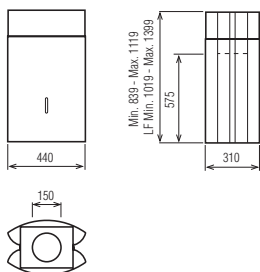


Finish Stainless steel
Controls 3 speed illuminated soft push buttons
Lights 4 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 440 x 310mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-61 dB(A)
Power consumption 260w
 Ceiling mounted
 Includes sound absorbing kit
 Optimised aspiration system
 Available with 1200 m³/h external motor
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Optica

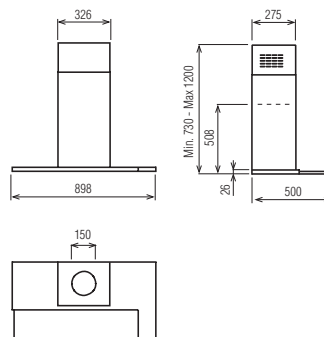


Finish Stainless steel and glass
Controls 3 speed illuminated soft push buttons
Lights 2 x 20w halogen lamps or 6 x fibre optic lamps (75w)
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-59 dB(A)
Power consumption 220w (260w with FO lamps)
 Includes sound absorbing kit
 Smart installation system
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Mini Om

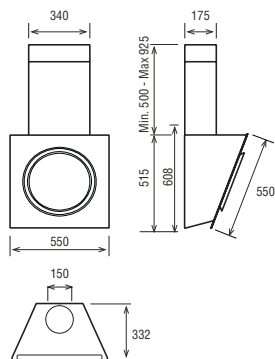


Finish Glass with polished stainless steel chimney kit
Controls 3 speed illuminated soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available widths 550mm
Maximum airflow 850 m³/h
IEC airflow 680 m³/h
Noise level 41-57 dB(A)
Power consumption 290w
 Includes sound absorbing kit
 Perimeter aspiration
Charcoal filter* CF/264

Platinum




Finish Stainless steel
Controls 3 speed illuminated 'Magic Wand' touch sensor + boost with remote control unit
Lights 1 x 40w halogen lamp + 3 x 40w lamps
Grease filter Metal washable grease filters & long-life odour filters included
Available widths 510mm
Maximum airflow 500 m³/h
Maximum airflow (recycling) 280 m³/h
IEC airflow 400 m³/h
Noise level 43-62 dB(A)
Power consumption 260w Ceiling or wall mounted 'Evolution' system
Charcoal filter* CF/433 (included)

Om

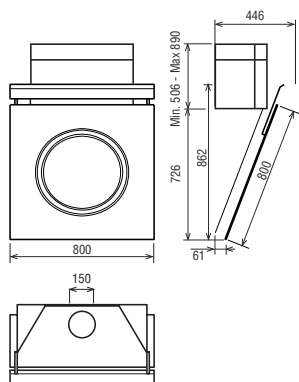

Finish Glass with polished stainless steel chimney kit
Controls 3 speed electronic touch screen controls + boost
Lights 4 x 20w halogen lamps
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available widths 800mm
Maximum airflow 850 m³/h
IEC airflow 680 m³/h
Noise level 41-57 dB(A)
Power consumption 330w
 Includes sound absorbing kit
 Perimeter aspiration
Charcoal filter* CF/264


Solaris

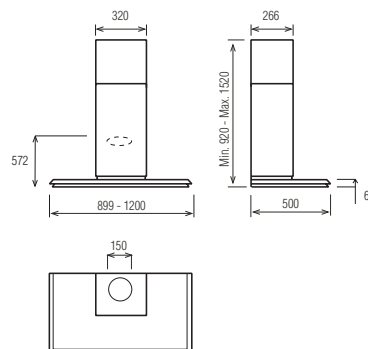

Finish Stainless steel and glass
Controls 3 speed illuminated soft push buttons
Lights 2 x 20w halogen lamps (3 x 20w in 120cm version)
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm or 1200mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-59 dB(A)
Power consumption 220w (240w in 120cm version)
 Includes sound absorbing kit
 Smart installation system
 Perimeter aspiration
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

* Charcoal filters are required if hood is to be used in recirculating mode

Star

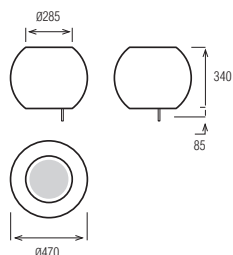

Finish Illuminated glass sphere with stainless steel

Controls 3 speed illuminated 'Magic Wand' touch sensor + boost with remote control unit

Lights 1 x 40w halogen lamp + 3 x 40w lamps

Grease filter Metal washable grease filters & long-life odour filters included

Available widths 470mm diameter

Maximum airflow 500 m³/h

Maximum airflow (recycling) 280 m³/h

IEC airflow 400 m³/h


Noise level 43-62 dB(A)

Power consumption 260w

Ceiling mounted 'Evolution' system

Charcoal filter* CF/433 (included)

Ala

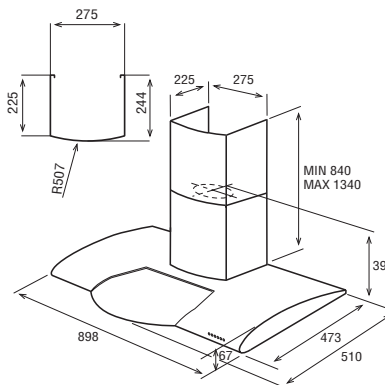

Finish Stainless steel with illuminated glass trim

Controls 3 speed electronic touch controls + boost with filter saturation indicators

Lights 2 x 11w fluorescent lamps

Grease filter Metal washable grease filter

Ducting connector 150mm (6in) diameter

Available widths 900mm

Maximum airflow 750 m³/h


IEC airflow 630 m³/h

Noise level 46-64 dB(A)

Power consumption 220w

Charcoal filter* CF/261

Twin

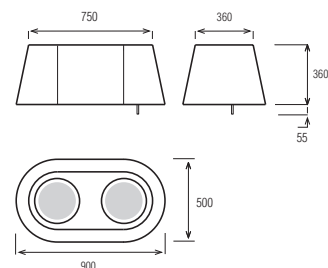

Finish Stainless steel

Controls 3 speed illuminated 'Magic Wand' touch sensor + boost with remote control unit

Lights 2 x 40w halogen lamp + 6 x 40w lamps

Grease filter Metal washable grease filters & long-life odour filters included

Available widths 900mm

Maximum airflow 1000 m³/h

Maximum airflow (recycling) 560 m³/h

IEC airflow 800 m³/h


Noise level 45-65 dB(A)

Power consumption 520w

Ceiling mounted 'Evolution' system

Charcoal filter* CF/433 (x2, included)

Aluminium

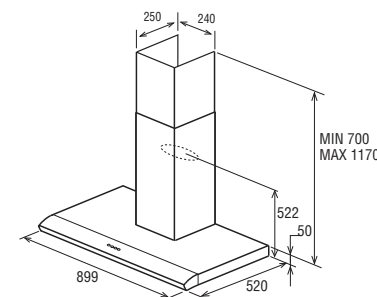

Finish Aluminium and silver colour

Controls 3 speed illuminated soft push buttons

Lights 2 x 20w halogen lamps

Grease filter Professional washable metal grease filter

Ducting connector 150mm (6in) diameter

Available widths 600mm or 900mm

Maximum airflow 800 m³/h

IEC airflow 650 m³/h

Noise level 46-64 dB(A)


Power consumption 220w

Smart installation system

Optimised aspiration system

Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Wave

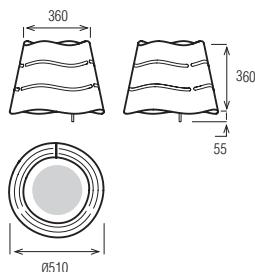

Finish Stainless steel

Controls 3 speed illuminated 'Magic Wand' touch sensor+ boost with remote control unit

Lights 1 x 40w halogen lamp + 3 x 40w lamps

Grease filter Metal washable grease filters & long-life odour filters included

Available widths 510mm diameter

Maximum airflow 500 m³/h

Maximum airflow (recycling) 280 m³/h

IEC airflow 400 m³/h


Noise level 43-62 dB(A)

Power consumption 260w

Ceiling or wall mounted 'Evolution' system

Charcoal filter* CF/433 (included)

Aqua

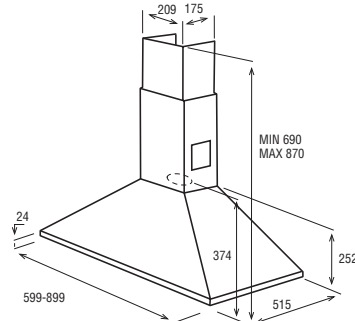

Finish Stainless steel

Controls 3 speed slider switch

Lights 2 x 40w hob lamps

Grease filter Metal washable grease filters

Ducting connector 125mm (5in) diameter

Available widths 600mm or 900mm

Maximum airflow 480 m³/h

IEC airflow 430 m³/h


Noise level 49-64 dB(A)

Power consumption 230w

Short flue and chimney extension kits available


Charcoal filter* CF/200

Aurora

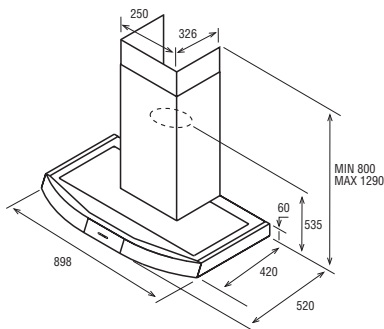


Finish Stainless steel and glass with dual direction lighting
Controls 3 speed illuminated soft push buttons
Lights 2 x 8w and 1x13w fluorescent lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Cube

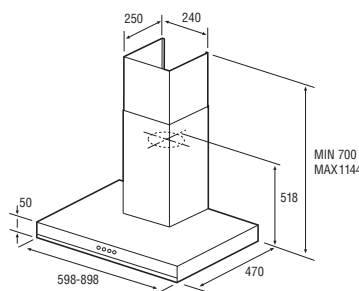


Finish Stainless steel with glass trim
Controls 3 speed soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 600mm or 900mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
 Also available with 1200 m³/h external motor
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Bridge

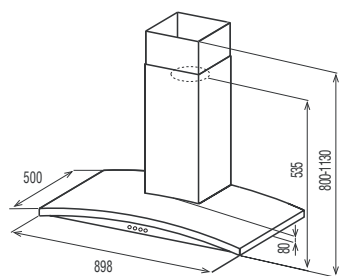


Finish Stainless steel and anthracite
Controls 3 speed soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Flag

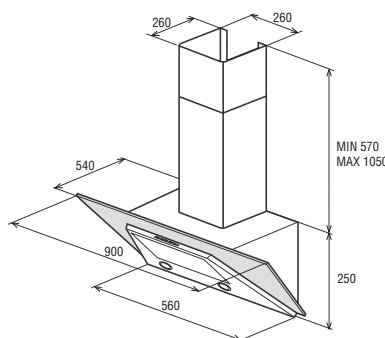


Finish Stainless steel with black/ aluminium multi layered body
Controls 3 speed touch control
Lights 2 x 20w halogen lamps
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
Charcoal filter* CF/414

Cresta

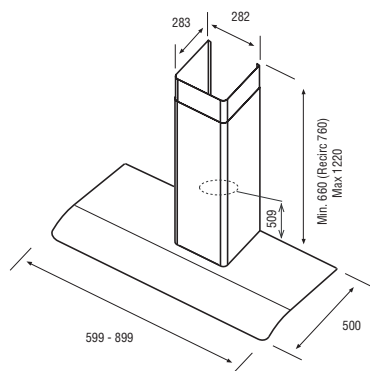

Finish Stainless steel and curved glass
Controls 3 speed soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 600mm or 900mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
 Also available with 1200 m³/h external motor
Charcoal filter* CF/262 or CF/195 + DK6/100 kit


Focus

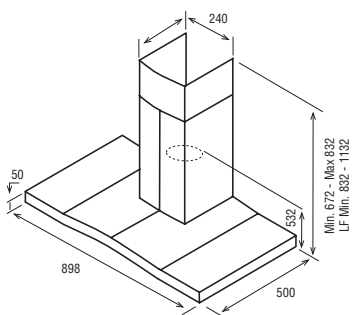

Finish Stainless steel
Controls 3 speed electronic touch control + boost with filter saturation indicators
Lights 4 x 20w halogen lamps
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit


* Charcoal filters are required if hood is to be used in recirculating mode

Glacier

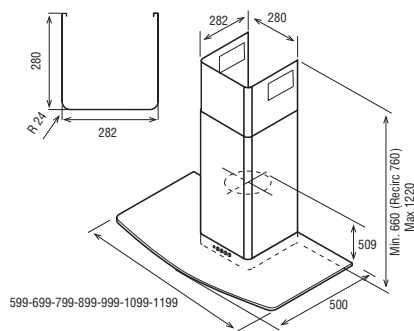


Finish Stainless steel and glass
Controls 3 speed soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 600, 700, 800, 900, 1000, 1100 or 1200mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
 Also available with 1200 m³/h external motor
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Key

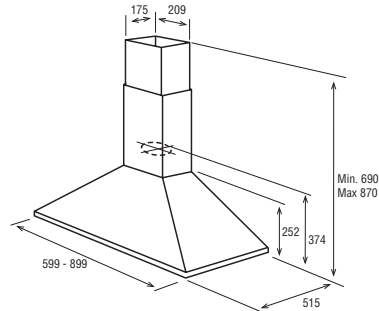


Finish Stainless steel
Controls 3 speed push buttons
Lights 2 x 20w halogen lamps
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available widths 600mm or 900mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Short flue and chimney extension kits available
Charcoal filter* CF/200

Igloo

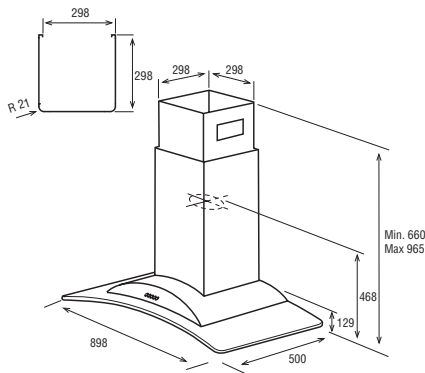


Finish Stainless steel and curved glass
Controls 3 speed push buttons
Lights 2 x 20w halogen lamps
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 850 m³/h
IEC airflow 650 m³/h
Noise level 46-64 dB(A)
Power consumption 240w
 Chimney flue extension available
Charcoal filter* CF/160

Plaza

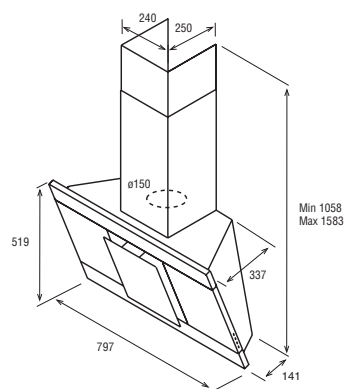


Finish Stainless steel with black glass centre panel
Controls 3 speed soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available widths 800mm
Maximum airflow 850 m³/h
IEC airflow 680 m³/h
Noise level 43-61 dB(A)
Power consumption 290w
 Perimeter aspiration
Charcoal filter* CF/264

Jem

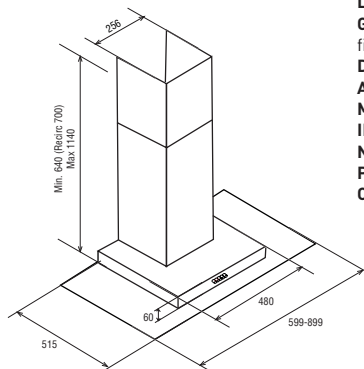

Finish Stainless steel and glass
Controls 3 speed push buttons
Lights 2 x 40w candle lamps
Grease filter Metal washable grease filter
Ducting connector 125mm (5in) diameter
Available widths 600mm or 900mm
Maximum airflow 480 m³/h
IEC airflow 430 m³/h
Noise level 49-64 dB(A)
Power consumption 220w
Charcoal filter* CF/16


Polar

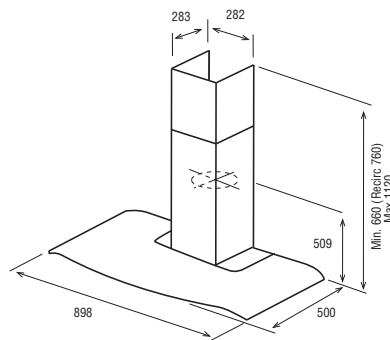

Finish Stainless steel with curved glass
Controls 3 speed soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
 Also available with 1200 m³/h external motor
Charcoal filter* CF/262 or CF/195 + DK6/100 kit


* Charcoal filters are required if hood is to be used in recirculating mode

Samurai

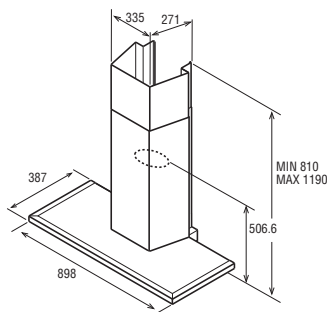


Finish Stainless steel
Controls 3 speed illuminated soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Stenar

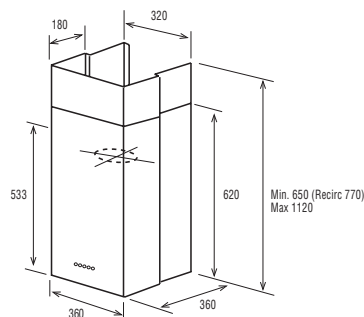


Finish Stainless steel
Controls 3 speed push buttons
Lights 2 x 20w halogen lamp
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 360mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Slope

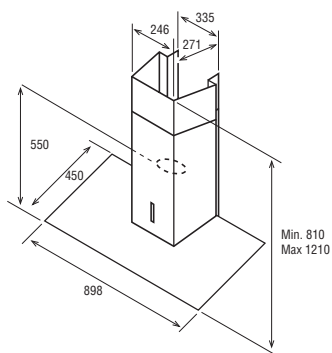


Finish Stainless steel with tinted glass
Controls 3 speed illuminated soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Stone

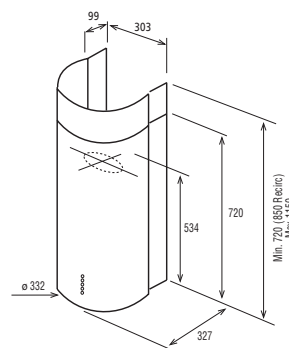


Finish Stainless steel
Controls 3 speed illuminated soft push buttons
Lights 2 x 20w halogen lamp
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 332mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Spot

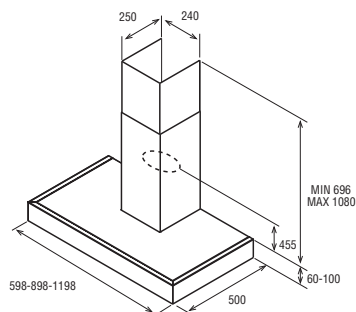

Finish Stainless steel
Controls 3 speed push buttons
Lights 2 x 20w halogen lamps, (3 x 20w halogen lamps in 1200mm version)
Grease filter Metal washable grease filters
Ducting connector 150mm (6in) diameter
Available widths 600mm, 900mm or 1200mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w (240w in 120cm version)
 600mm & 900mm has 60mm high body
 1200mm has 100mm high body
Charcoal filter* CF/262 or CF/195 + DK6/100 kit


Tamaya

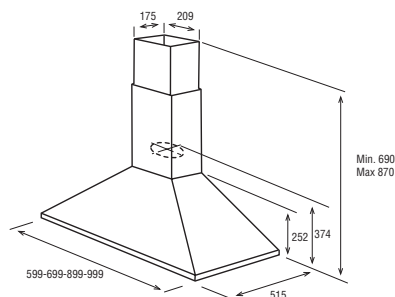

Finish Stainless steel
Controls 3 speed slider control
Lights 2 x 40w hob lamps
Grease filter Metal washable grease filters
Ducting connector 125mm (5in) diameter
Available widths 600, 700, 900 or 1000mm in stainless steel; 600 or 900mm in black or white
Maximum airflow 480m³/h
IEC airflow 430m³/h
Noise level 49-64 dB(A)
Power consumption 230w
 Short flue and chimney extension kits available for stainless steel versions only
Charcoal filter* CF/200


* Charcoal filters are required if hood is to be used in recirculating mode

Tonda

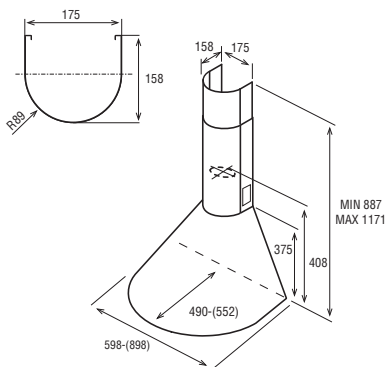


Finish Stainless steel
Controls 3 speed slider control
Lights 2 x 40w hob lamp
Grease filter Metal washable grease filters
Ducting connector 125mm (5in) diameter
Available widths 600mm or 900mm
Maximum airflow 480m³/h
IEC airflow 430m³/h
Noise level 49-64 dB(A)
Power consumption 230w
Charcoal filter* CF/200

Aluminose Island

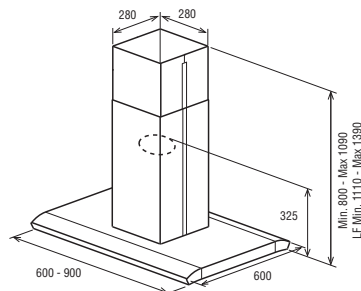


Finish Aluminium and silver colour
Controls 3 speed illuminated soft push buttons
Lights 4 x 20w halogen lamp
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available size 900mm x 600mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 46-64 dB(A)
Power consumption 260w
 Optimised aspiration system
 Available with 1200 m³/h external motor
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Tuscan

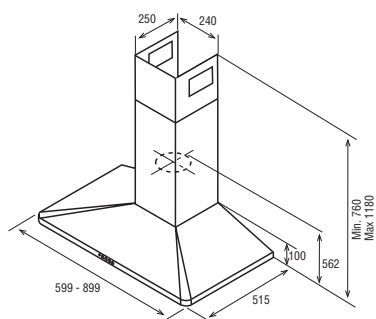


Finish Stainless steel
Controls 3 speed soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 600mm or 900mm
Maximum airflow 750m³/h
IEC airflow 630m³/h
Noise level 46-64 dB(A)
Power consumption 220w
 Smart installation system
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Cubica Island

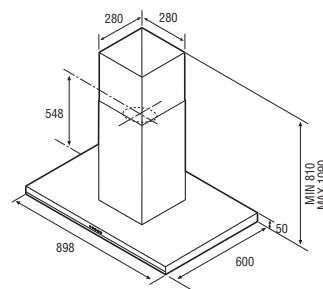


Finish Stainless steel with glass trim
Controls 3 speed soft push buttons
Lights 4 x 20w halogen lamp
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available size 900mm x 600mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 260w
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Typhoon

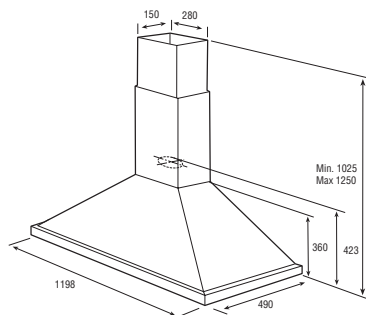


Finish Stainless steel
Controls 3 speed electronic touch control + boost with filter saturation indicators
Lights 3 x 20w halogen lamp
Grease filter Metal washable grease filters
Ducting connector 125mm (5in) diameter
Available widths 1200mm
Maximum airflow 600 m³/h
IEC airflow 500 m³/h
Noise level 53-73 dB(A)
Power consumption 246w
Charcoal filter* CF/150

Freespot Island

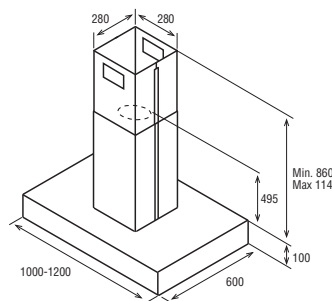


Finish Stainless steel
Controls 3 speed push buttons
Lights 4 x 20w halogen lamp
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available size 1000mm x 600mm or 1200mm x 600mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 260w
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Glacier Island

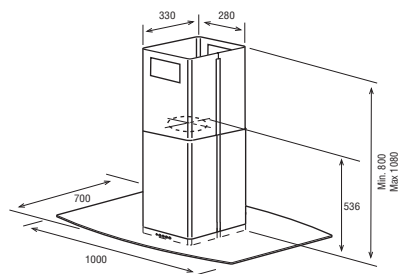


Finish Stainless steel and glass
Controls 3 speed soft push buttons
Lights 4 x 20w halogen lamp
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available size 1000mm x 700mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 260w
 Optimised aspiration system
 Available with 1200 m³/h external motor
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Naked




Finish Stainless steel
Controls 3 speed illuminated 'Magic Wand' touch sensor + boost
 Remote control unit available (optional)
Lights 1 x 40w halogen lamp
Grease filter Metal washable grease filters & long-life odour filters included
Available widths 248mm diameter
Maximum airflow 500 m³/h
Maximum airflow (Recycling) 280 m³/h
IEC airflow 400 m³/h
Noise level 43- 62 dB(A)
Power consumption 140w
 Ceiling mounted 'Evolution' system
Charcoal filter* CF/433 (included)

Iceberg Island

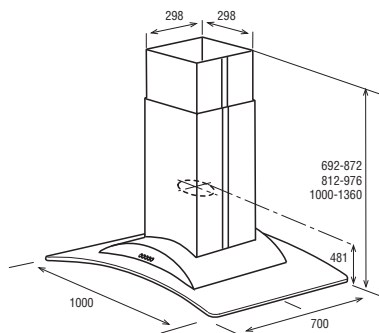


Finish Stainless steel and curved glass
Controls 3 speed push buttons
Lights 4 x 20w halogen lamp
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available size 1000mm x 700mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 46-64 dB(A)
Power consumption 280w
 Available in 3 height adjustable models, SF: 692-872mm, STD: 812-976mm or LF: 1000-1360mm
 Replacement extension kit (KIT00424) also available making hood 1600mm high.
Charcoal filter* CF/160

Salt Lake Island

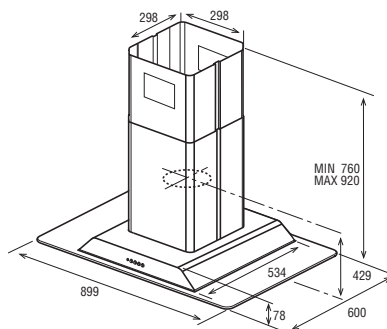


Finish Stainless steel and glass
Controls 3 speed push buttons
Lights 2 x 20w halogen lamp
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available size 900mm x 600mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
Charcoal filter* CF/160

Nadir

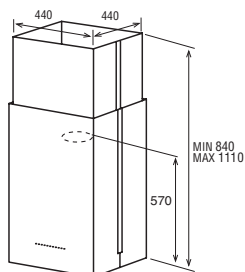

Finish Stainless steel
Controls 3 speed touch control + boost
Lights 4 x 20w halogen lamps
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available size 440mm x 440mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 260w
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit


Tuscan Island

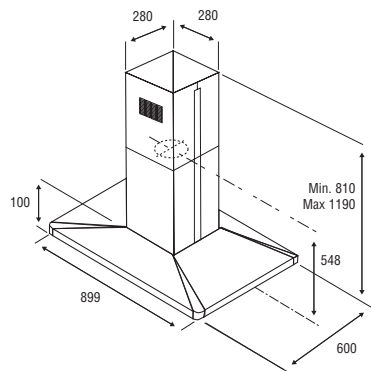

Finish Stainless steel
Controls 3 speed soft touch push buttons
Lights 4 x 20w halogen lamp
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available size 900mm x 600mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 260w
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit


* Charcoal filters are required if hood is to be used in recirculating mode

Hydra Corner

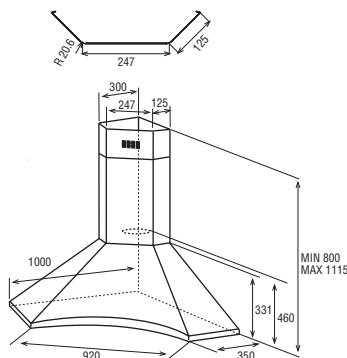


Finish Stainless steel
Controls 3 speed push buttons
Lights 4 x 20w halogen lamp
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available size 1000mm x 1000mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 260w
Charcoal filter* CF/200

Feeling

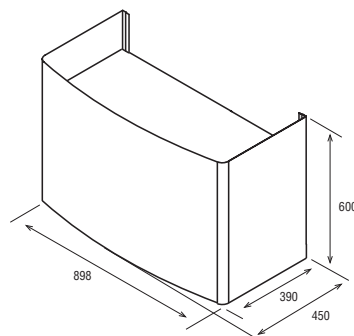


Finish Stainless steel
Controls 3 speed slide control
Lights 2 x 20w halogen lamps
Grease filter Metal washable grease filters
Ducting connector 150mm (6in) diameter
Available widths 900mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 220w
Charcoal filter* CF/200

Synthesis Corner

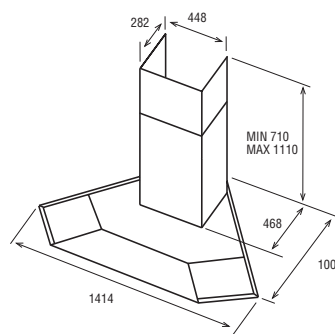


Finish Stainless steel and glass
Controls 3 speed control-ball switch + boost with filter saturation indicators
Lights 4 x 20w halogen lamp
Grease filter Professional washable metal grease filter
Ducting connector 150mm (6in) diameter
Available widths 1000mm x 1000mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 260w
 Optimised aspiration system
Charcoal filter* CF/262 or CF/195 + DK6/100 kit

Pro Anglo

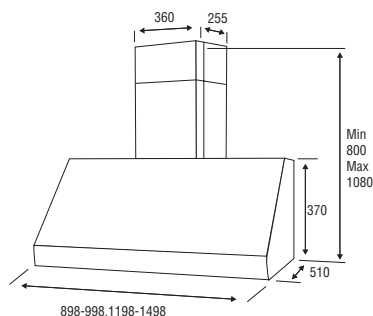


Finish Stainless steel
 Special order: black, white, blue, green, maroon or cream
Controls 3 speed slider switch (variable speed switch on external motor version)
Lights 2 x 20w halogen lamps
Grease filter Metal washable grease filters
Ducting connector 150mm (6in) diameter
Available widths 900mm, 1000mm, 1200mm & 1500mm
Maximum airflow 750 m³/h, (1200 m³/h external motor version)
IEC airflow 630 m³/h, (850 m³/h external motor version)
Noise level 54-69 dB(A) [33-51 dB(A) external motor version]
Power consumption 220w (240w external motor version)
Charcoal filter* CF/200

Cove

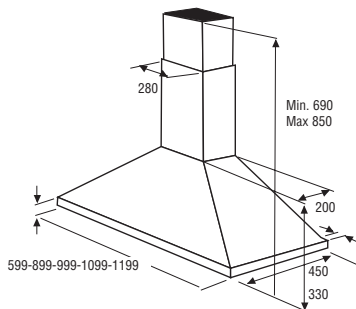


Finish Stainless steel, black, white, blue, green, maroon or cream finishes.
Controls 3 speed slider controls
Lights 2 x 40w hob lamps (2 x 20w halogen lamps remote version)
Grease filter Metal washable grease filter
Ducting connector 125mm (5in) diameter (150mm (6in) remote version)
Available widths 600mm, 900mm, 1000mm, 1100mm or 1200mm
Maximum airflow 480 m³/h, (1200 m³/h external motor version)
IEC airflow 440 m³/h, (850 m³/h external motor version)
Noise level 54-69 dB(A) [33-51 dB(A) external motor version]
Power consumption 320w (240w external motor version)
Charcoal filter* CF/48
 (2 required not remote motor)

Pro Europa

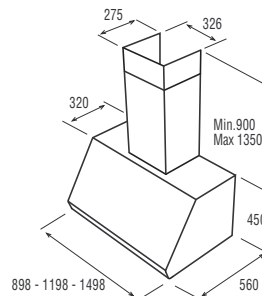


Finish Stainless steel
Controls 3 speed rotary switch
Lights 2 x 20w halogen lamps (900mm) 4 x 20w halogen lamps (1200mm & 1500mm)
Grease filter Metal washable grease filters
Ducting connector 200mm (8in) diameter
Available widths 900mm, 1200mm & 1500mm
Maximum airflow 1250 m³/h
IEC airflow 1100 m³/h
Noise level 55-69 dB(A)
Power consumption 420w (900mm) 460w (1200mm & 1500mm)
 Ducted version only

Glide

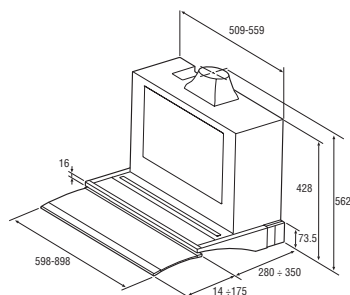


Finish Stainless steel
Controls 3 speed illuminated soft push buttons
Lights 2 x 20w halogen lamps
Grease filter Metal washable grease filter
Ducting connector 150mm (6in) diameter
Available widths 600mm or 900mm
Maximum airflow 800 m³/h
IEC airflow 650 m³/h
Noise level 43-61 dB(A)
Power consumption 260w
Charcoal filter* CF/150

Built in 60 Deluxe

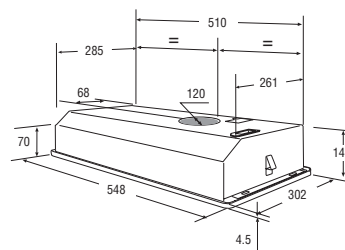


Built In 60 Deluxe
Finish Stainless steel
Controls Variable speed slider control
Lights 14w fluorescent lamps
Grease filter Metal washable grease filter
Ducting connector 125mm (5in) diameter
Available widths 550mm
Maximum airflow 480 m³/h
IEC airflow 440 m³/h
Noise level 54-69 dB(A)
Power consumption 320w
Charcoal filter* CF/150

Slide Away 60 & 90 Twin

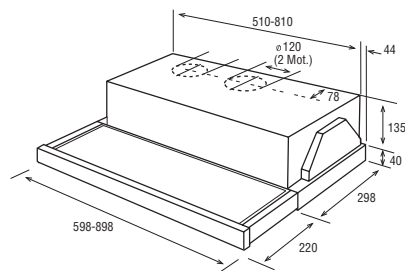


Finish Grey with stainless steel front panel
Controls 3 speed slider controls
Lights 2 x 40w hob lamps
Grease filter Metal washable grease filter
Ducting connector 125mm (5in) diameter
Available widths 600mm or 900mm
Maximum airflow 480 m³/h
IEC airflow 430m³/h
Noise level 46-64 dB(A)
Power consumption 220w
Charcoal filter* CF/48 [2 required]

Built in 80 UHS

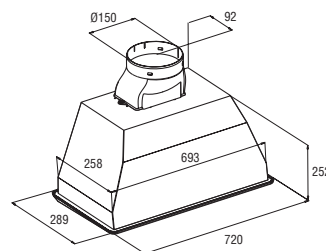

Built In 80 UHS
Finish Black or grey
Controls 4 speed slider control
Lights 2 x 20w halogen lamps
Grease filter Metal washable grease filters
Ducting connector 150mm (6in) diameter
Available widths 720mm
Maximum airflow 750 m³/h
IEC airflow 630 m³/h
Noise level 46-64 dB(A)
Power consumption 240w
Charcoal filter* CF/200

Built in 52 Built in 60, 60T & 80T Built in 60 Remote & 80 Remote

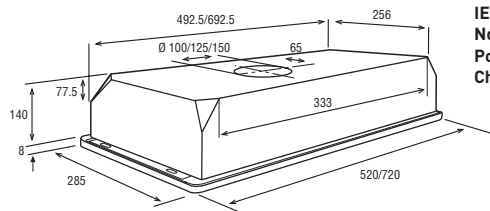


Built in 52
Finish Black, white, or grey
Controls 3 speed slider controls
Lights 2 x 40w hob lamps
Grease filter Disposable fibre grease filter
Ducting connector 100mm (4in) diameter
Available widths 520mm
Maximum airflow 280 m³/h
IEC airflow 250 m³/h
Noise level 53-65 dB(A)
Power consumption 200w
Charcoal filter* CF/48

Built In 60, 60T & 80T
Finish Black or white (BI60T also in grey)
Controls 3 speed slider controls
Lights 2 x 40w hob lamps
Grease filter Metal washable grease filters
Ducting connector 100mm (4in) diameter (BI60), 125mm (5in) diameter (BI60T & BI80T)
Available widths 520mm or 720mm
Maximum airflow 270 m³/h (BI60) 480 m³/h (BI60T, BI80T)
IEC airflow 250 m³/h (BI60), 440 m³/h (BI60T, BI80T)
Noise level 53-65 dB(A) (BI60), 54-69 dB(A) (BI60T, BI80T)
Power consumption 200w (BI60), 320w (BI60T, BI80T)
Charcoal filter* CF/48 [2 required in Twin motors]

Built In 60 Remote & 80 Remote
Finish Grey
Controls Variable speed slider control
Lights 2 x 20w halogen lamps
Grease filter Metal washable grease filters
Ducting connector 150mm (6in) diameter
Available widths 520mm or 720mm
Maximum airflow 1200 m³/h
IEC airflow 850 m³/h
Noise level 31-51 dB(A)
Power consumption 240w
 Ducted version only

* Charcoal filters are required if hood is to be used in recirculating mode

Integrated NG Integrated NG SP & SP Twin

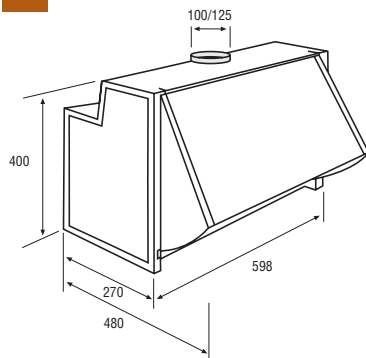

Integrated NG

Finish Grey

Controls 3 speed slider control

Lights 2 x 40w hob lamps

Grease filter Disposable fibre grease filter

Ducting connector 100mm (4in) diameter

Available widths 600mm

Maximum airflow 270 m³/h

IEC airflow 240 m³/h

Noise level 44-56 dB(A)

Power consumption 240w

Charcoal filter* CF/29

Integrated NG SP & SP Twin.

Finish Grey

Controls 3 speed slider control

Lights 2 x 40w hob lamps

Grease filter NG disposable fibre grease filter. SP & SPT Metal washable grease filters.

Ducting connector 100mm (4in) diameter (SP), 125mm (5in) diameter (SPT)

Available widths 600mm

Maximum airflow 300 m³/h (SP), 540 m³/h (SPT)


IEC airflow 270 m³/h (SP), 480 m³/h (SPT)

Noise level Speed 3 50-62 dB(A) (SP), 55-68 dB(A) (SPT)

Power consumption 240w (SP), 360w (SPT)

Charcoal filter* CF/29 (2 required in Twin)

Chic

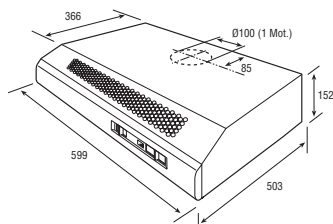

Finish Black, white or brown

Controls 3 speed slider control

Lights 40w hob lamp

Grease filter Disposable fibre grease filter

Ducting connector 100mm (4in) diameter

Available widths 600mm

Maximum airflow 230 m³/h


IEC airflow 210 m³/h

Noise level 51-61 dB(A)

Power consumption 140w

Charcoal filter* CF/50 (included)

Concorde & Concorde Twin

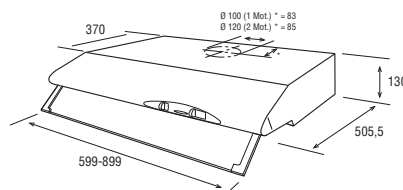

Controls 3 speed slider control

Lights 2 x 40w hob lamp

Grease filter Disposable fibre grease filter (Concorde). Metal washable grease filter (Concorde Twin)

Ducting connector 100mm (4in) dia (Concorde). 125mm (5in) dia (Concorde Twin)

Available widths 600mm (Concorde) 600mm, 900mm (Concorde Twin)

Maximum airflow 250 m³/h (Concorde). 400 m³/h (Concorde Twin)

IEC airflow 220 m³/h (Concorde)

360 m³/h (Concorde Twin)

Noise level 52-67dBA (Concorde)


55-69dBA (Concorde Twin)

Power consumption 200w (Concorde)


320w (Concorde Twin)

Charcoal filter* CF/50 (Single motor), CF/190 (Twin motor) (included)

External Motor

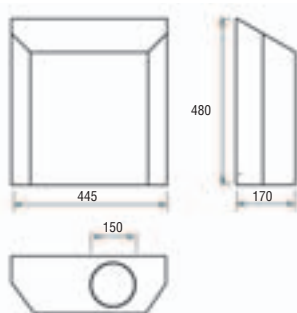

Back Plate

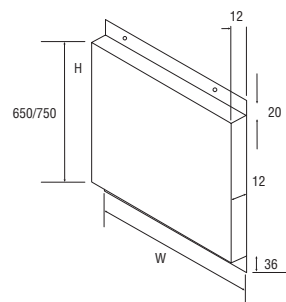

* Charcoal filters are required if hood is to be used in recirculating mode

Design

Modern kitchens are becoming more of a social centre to the home and are thus increasingly driven by design. Not only must your kitchen be a practical place where food can be prepared and families or friends gather, but now it must reflect your personal style, taste and character. This is especially true in your choice of cooker hood; not only must it keep your kitchen clear of steam, smoke and odours but it must also make a strong design statement. Style is of course a very personal thing, but no other cooker hood manufacturer offers more choice or further pushes the boundaries of cooker hood design than Elica.

Size

Most hoods are made to fit the popular widths of hobs or cookers so you will want to match the canopy width of your hood to your intended hob size. However, many modern designers sometimes double up smaller hoods to make a very strong, “double barreled” design statement.

Ceiling Height

It is very important for you to check the height of your ceiling to see if a hood will fit. Remember to allow for the height of the units and work tops and then add a minimum of 650mm above an electrical hob or 700mm above a gas hob. The remaining distance to the ceiling is where you can fit your hood. There is no such thing as a standard ceiling height in the UK, so it is very important to measure up before you buy.

Extraction Power

The hood must be powerful enough to change the air in the kitchen ideally 10 times per hour, but at least 8. A good formula to follow in order to help you calculate the power that you need is to multiply the volume of your room by 10 (Volume = length x width x height). An average room is approximately 25m³; therefore the extraction rate required for the average room is 250m³/h. All Elica cooker hoods have maximum airflow figures in excess of 250m³/h, some as much as 1200m³/h. If you are a more “experimental” chef then a higher extraction rate is recommended.

Ducting or Recycling

Will your new hood be ducted to the outside of the house or a recycling model? If ducted out, the ducting must be the correct size as recommended in the hood’s technical specification (see pages 72 to 84). A cooker hood installed with the correct ducting will extract virtually all the steam, cooking odours and airborne grease from the kitchen. For more information on ducting see page 71. If however, it’s impractical to install ducting in your home, then charcoal filters can be used to clean and re-circulate fresh air around the room.

Whichever hood is chosen, Elica adopt only the latest European standards when measuring the efficiency of their products. That’s why Elica cooker hoods are recognised around the world for their unsurpassed beauty and performance.



Choosing your Elica cooker hood

Your Guarantee

Elica is totally committed to service, quality and innovation and we are proud to supply the world’s finest cooker hoods to our customers. Elica cooker hoods are designed for use in domestic kitchens and are guaranteed for 2 years against faulty material or workmanship, protecting your hood against mechanical or electrical failure.

Installation

We recommend that your Elica cooker hood should be installed by a qualified engineer. If the hood is to be ducted to the outside, it is important that the correct size of ducting is used. This will be determined by the ducting connector on the hood and as directed in this brochure, on our web site (www.elica.co.uk) or in the hoods fitting instructions.

Minimum Installation Heights

Minimum installation heights are generally 650mm above electric hobs and 700mm above gas hobs. The height above gas is recommended for hobs of 11.3kw or less. For higher rated hobs please seek advice.





















Our new ‘vertical’ hoods, such as ‘Mini 0m’ and ‘Plaza’ can be as low as 400mm above electric hobs and our model ‘0m’ can be as low as 300mm above electric hobs.

Glide 600mm or 900mm decorative built in hoods can also be as low as 430mm above electric hobs.

Whilst every effort is made to ensure that the information contained in this brochure is correct at time of going to press, D.R. Cooker Hoods cannot be held responsible for any errors or omissions.

Specification may differ from those described or illustrated and D.R. Cooker Hoods Ltd reserve the right to change specification without prior notice

Due to printing limitations, colours and finishes are indicative only. If particular features, colours or sizes are important to you, please check with your Elica retailer prior to purchasing.

	Width		Remote control
	Remote control		Control ball
	Touch screen		Push button
	Touch control		Visual display
	Slider control		Magic Wand Control
	Automatic sensor technology		Meteo technology
	Neon		Halogen
	Candle bulb		Ambient Lighting
	Wall Mounting System		External motor
	Colours		Optical fibre

D R Cooker Hoods Ltd

2 Alpha Road Aldershot

Hampshire GU12 4RG

Telephone: 01252 351111

Fax: 01252 311608

sales@drcookerhoods.co.uk

www.elica.co.uk